

## Duplex Cable Assemblies

Zipcord cables are used to meet the requirements for two-fiber cable assemblies, utilizing SC, FC, ST and LC connectors.


### Features

- Flexible, 2-fiber design
- Riser, Plenum and LSZH\* rated cables available (\*contact AFL)

### Applications

- Private networks
- Data centers
- High-density applications
- Interconnect and cross-connect
- Premise installations

### Cable Components

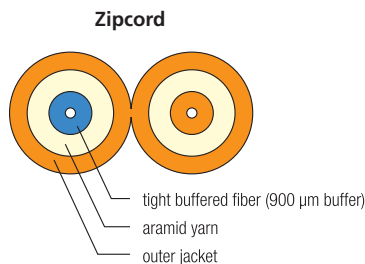

### Qualifications

GOVERNING BODY	STANDARD CODE	COMPONENT
Telcordia	GR-409 GR-326	Cable Connectors
RoHS	Compliant	Cable
ITU	G.652.D, G.657.A1	Single-mode optical fiber only

**Contact AFL for further details.**

### Ordering Information

UST	UST	RZ	002	Q	0010
Connector End A	Connector End B	Cable Type	Fiber Count	Fiber Type	Cable Length (meters)
<b>Single-mode</b> AFC = Angle FC UFC = Ultra FC UST = Ultra ST ADL = Angled LC Duplex ASF = Angled SC Duplex USF = Ultra SC Duplex UDL = Ultra LC Duplex  <b>Multimode</b> PFC = FC MM PST = ST MM PSF = SC Duplex MM PDL = LC Duplex MM	<b>Single-mode</b> AFC = Angle FC UFC = Ultra FC UST = Ultra ST ADL = Angled LC Duplex ASF = Angled SC Duplex USF = Ultra SC Duplex UDL = Ultra LC Duplex XXX = No connector  <b>Multimode</b> PFC = FC MM PST = ST MM PSF = SC Duplex MM PDL = LC Duplex MM XXX = No connector	<b>Zipcord</b> RZ = 3.0 mm Riser PZ = 3.0 mm Plenum R20Z = 2.0 mm Riser P20Z = 2.0 mm Plenum R16Z = 1.6 mm Riser P16Z = 1.6 mm Plenum	002 = 2	Q = Single-mode** 2 = Multimode 62.5/125 OM3 L = Multimode 50/125 OM3 C = Multimode 50/125 OM4	XXXX (specify length) 0010 = 10 meters
<b>NOTES:</b> 1. Refer to Connector Specifications page. * Single connector options, quantity two per end. Duplex connectors are assembled with removable clip. ** All Single-mode cable assemblies use the ITU G.652.D/G.657.A1 standard. *** LC Connectors available on 2.0 mm Zipcord cable.					