



# **TSBAT12-10L-WT**

## **DATA SHEET**

### **12V 10Ah Wide Temp LFP Battery**

#### **Features**

- **Wide Temp Charging:** -30C to +60C
- **Wide Temp Discharge:** -40C to +70C
- **Longer Cycle Life:** Up to 20X over Lead Acid
- **Less Weight:** ~40% less than Lead Acid
- **Higher Power:** 2x more Watt Hours than Lead Acid
- **Stable and Safe Lithium Iron Phosphate (LiFePO4)**
- **On Board Battery Management (BMS)**
- **Size is same as comparable Lead Acid Battery**
- **Drop in Replacement for Lead Acid Battery**



*TSBAT12-10L-WT  
Wide Temp Lithium Battery*

#### **Applications**

- **Remote Power Systems**
- **Backup Power Systems**
- **Off-Grid Systems**
- **UPS Systems**
- **Lighting**
- **RV and Boat**

#### **Description**

The TSBAT12-10L-WT LFP (LiFePO4) battery is a wide temperature, high reliability drop-in replacement for comparable Lead Acid batteries. It provides >4000 discharge cycles @ 80% discharge, about 20x what a Sealed Lead Acid battery typically provides. It also provides almost 2x usable energy storage over lead acid batteries with the same Ah rating.

Typically LiFePO4 batteries should not be charged below 0C and require DC heaters to be able to charge at low temperatures but with our wide temp Aluminum anode, the battery is able to charge down to -30C without adversely affecting cycle life.

The integrated battery management system (BMS) handles all charging and discharging regulation so that the battery can be charged using the same solar or grid connect chargers used for Lead Acid batteries. Along with its standard mechanical size, the integrated BMS allows the battery to be a true drop-in replacement for a similar sized Lead Acid battery.

The LiFePO4 chemistry is very stable and minimizes the risk of explosion or combustion due to impact, overcharging or short circuit. The 40% less weight make the battery easier to transport and install at remote sites.




Up to 4 batteries can be connected in series or parallel to achieve a higher battery bank voltage (series) or more energy storage (parallel). There are two F2 spade terminals for connecting battery cables.

For long term storage it is recommended to charge to 60% charge every 6 months.

## Specifications

<b>Nominal Voltage</b>	12.8V
<b>Nominal Capacity</b>	10.8Ah 138Wh
<b>Internal Resistance</b>	<120mΩ
<b>Cycle Life</b>	>4000 Cycles @ 80% DOD
<b>Self Discharge</b>	<3% per month
<b>Charge Voltage</b>	14.6 +/-0.2V
<b>Charge Current (Max)</b>	1.62A From -30C to +5C 5.4A From +5C to +60C
<b>BMS Charge Cutoff Voltage</b>	14.6 +/- 0.2V
<b>Typical Discharge Current</b>	5.4A Max
<b>Peak Discharge Current</b>	20A for < 3 seconds
<b>BMS Discharge Cutoff Voltage</b>	8.8V
<b>Charge Temperature</b>	-30C to +60C (-22 to 140F)
<b>Discharge Temperature</b>	-40C to +70C (-40 to 158F)
<b>Suggested Storage Temperature</b>	0C to +25C (32 to 77F)
<b>Weatherproofing</b>	IP65
<b>Case</b>	ABS
<b>Terminal</b>	F2 (0.25" Spade Terminal)
<b>Dimensions (LxWxH)</b>	5.95 x 2.56 x 3.9" (151 x 65 x 99mm)
<b>Weight</b>	2.6lb (1.2kg)
<b>Parallel or Serial Connections</b>	4 batteries maximum serial or parallel
<b>Shipping Class</b>	Class 9 – Hazardous Materials
<b>Certifications</b>	UN38.3
<b>Warranty</b>	3 Years

LiFePO4 Voltage versus Capacity		
VOLTAGE (12V)	VOLTAGE (24V)	CAPACITY
14.6V	29.2V	100% (charging)
13.6V	27.2V	100% (resting)
13.4V	26.8V	99%
13.32V	26.64V	90%
13.2V	26.4V	70%
13.12V	26.24V	40%
13V	26V	30%
12.92V	25.84V	20%
12.8V	25.6V	17%
12.52V	25.04V	14%
12V	24V	9%
10V	20V	0%

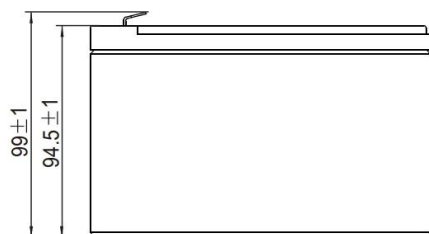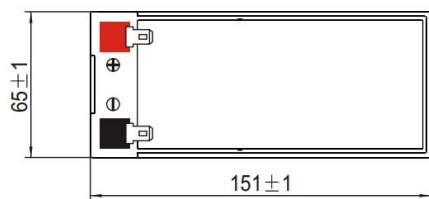

## System Ordering:

**TSBAT12-10L-WT** 12V 10.8Ah Wide Temperature LiFePO4 Lithium High Cycle Long Life Battery

For further information contact:

[Tyconsystems.com](http://Tyconsystems.com)

