



Hand Pump Dehydrator

- To meet our global customer’s RoHS environmental needs, we have changed our desiccant to a cobalt-chloride free desiccant. The compliant desiccant is orange when dry and turns green when saturated.

Product Classification

Product Type Dehydrator

General Specifications

Dehydrator Type Desiccant

Desiccant Capacity 1982 liters (70 cu ft) at 80% RH, +20 °C

Dew Point -36 °C (-33 °F)

Mounting Floor

Port Count 1

Port Type Gas inlet valve

Dimensions

Product Height 660.4 mm | 26 in

Product Width 254 mm | 10 in


Product Depth 254 mm | 10 in

Volume Capacity, maximum 0.057 m³ | 1.999 ft³

Volume Capacity, minimum 0 m³ | 0 ft³

860G


Outline Drawing–Front

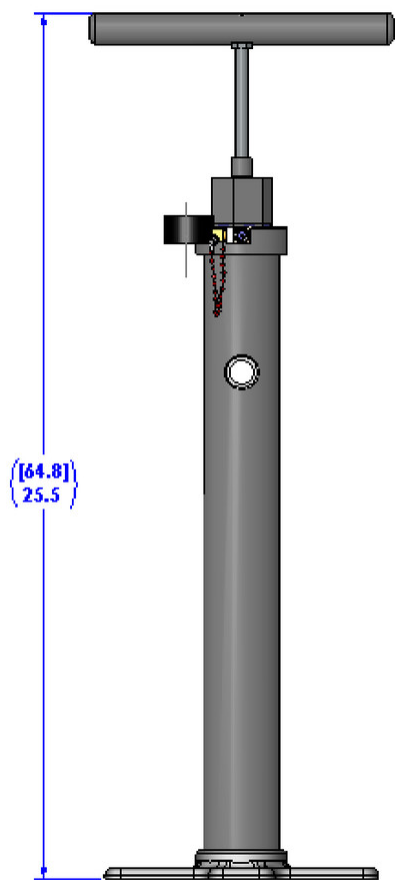

860G FRONT VIEW

860G


Outline Drawing–Side

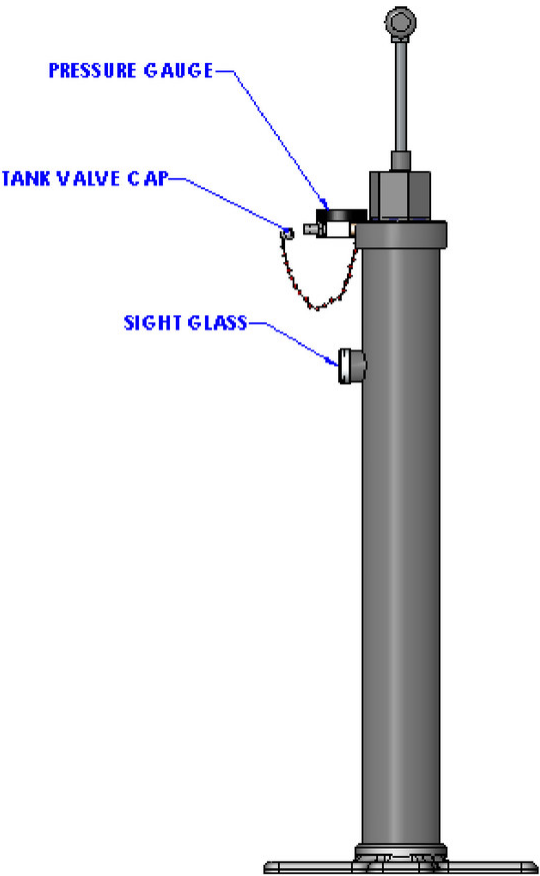

860G SIDE VIEW

860G

Outline Drawing–Top

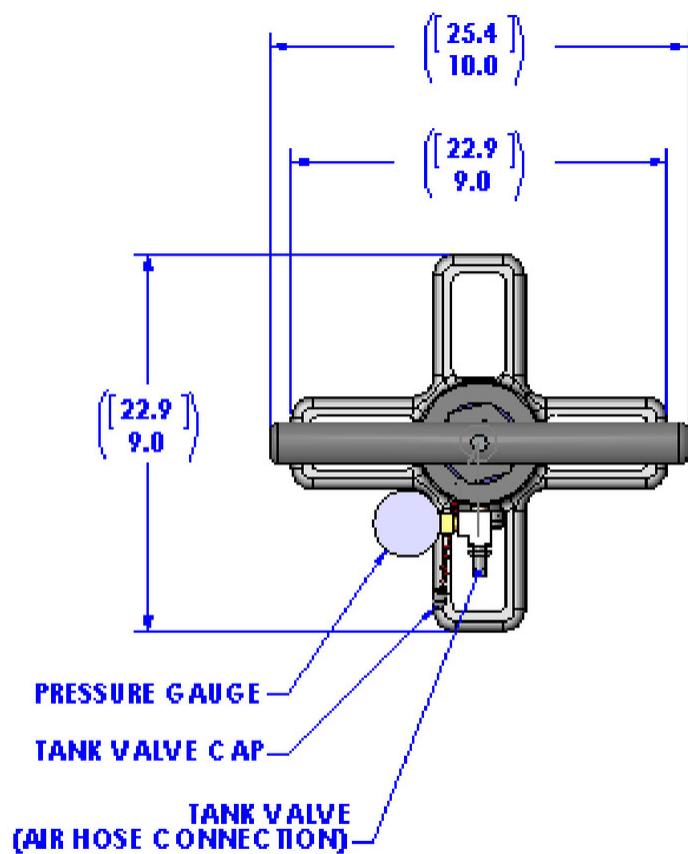

860G TOP VIEW

Environmental Specifications

Operating Temperature -15 °C to +50 °C (+5 °F to +122 °F)

Packaging and Weights

Height, packed	241 mm 9.488 in
Width, packed	241 mm 9.488 in
Depth, packed	667 mm 26.26 in
Included	Instruction sheet
Weight, gross	6.5 kg 14.33 lb
Weight, net	6.4 kg 14.11 lb

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant

