DATA SHEET

OUTDOOR SHIELDED CAT5e ETHERNET CABLE WITH HARTING PUSH-PULL CONNECTOR

Designed for harsh outdoor applications, this shielded, Cat5e Ethernet cable with HARTING push-pull connectors ensure a solid connection for Tarana hardware.

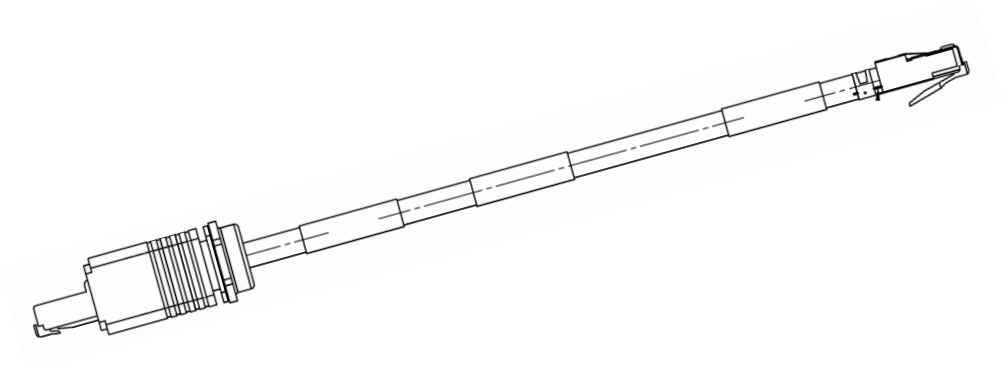

Description	5 m outdoor shielded Cat5e Ethernet cable with HARTING push-pull connector
Product SKU	33-0007-005 (5 m)
Manufacturer	HARTING
Wire Outer Diameter	1.05 mm
Mating Cycles	≤ 750
Shielding	Fully shielded, 360° sheilding contact
Termination Method	Piercing termination
Locking Type	Push-pull
Number of Contacts	8
Conductor Cross-Section	0.08–0.22 mm stranded
Conductor Cross-Section	AWG 28–24 stranded
Wire Outer Diameter	1.05 mm
Cable Diamter	5–6.5 mm
Limiting Temperature	-40°C to 70°C
Max Pulling Tension	111.205 N
Min Bend Radius/Minor Axis	63.500 mm

© Tarana Wireless, Inc. All rights reserved.